



Features

- Input voltage range: 2.7-V to 5.5-V
- VPOS positive boost converter output
 - ◇ Adjustable output: up to 15 V
 - ◇ Switch current limit 2 A
 - ◇ Conversion efficiency: up to 89%
- VNEG negative inverting buck-boost converter output
 - ◇ Adjustable output: down to -15 V
 - ◇ Switch current limit 2 A
 - ◇ Conversion efficiency: up to 81%
- Control output for external P-channel FET
- Supports complete disconnection from battery
- 1µA shutdown current
- Individual enable inputs for flexible output sequencing
- Protection features
 - ◇ Over voltage protection at VPOS and VNEG
 - ◇ Input under voltage lockout
 - ◇ VPOS and VNEG SCP
 - ◇ Thermal shutdown protection
- 3-mm × 3-mm QFN-20 package

Application

- LCD and AMOLED displays (approx. 4" to 17")
 - ◇ Personal electronics (notebook, monitor, gaming)

General Description


The LP6267L device is a dual-output DC-DC converter supply that generates a positive output up to 15 V and a negative output down to -15 V. The converter maintains low output voltage ripple. Typically, the maximum output currents are in the 200- mA to 500-mA range, depending on input voltage to output voltage ratio and the current limit option. The combined (VPOS and VNEG) efficiency reaches 85% to keep systems cool or achieve a longer battery-on time. The input voltage range of 2.7 V to 5.5 V allows the devices to be powered from batteries or from fixed 3.3-V or 5-V rails.

The converter operates with a fixed frequency PWM control topology and, when operating in power save mode, uses a pulse skipping mode at light load currents. It operates with only 500µA device quiescent current.

Independent enable pins allow flexible power-up and power-down sequencing for both outputs. The positive and negative outputs operate independently, allowing for non-symmetrical output voltages and currents.

The converter has an internal current limit, over voltage protection, and a thermal shutdown for highest reliability under fault conditions. The converter is available in a 3-mm × 3-mm QFN-20 package. The solution size is small with a minimum switching frequency of 1.25 MHz for smaller inductors and few other external components required.


Order Information

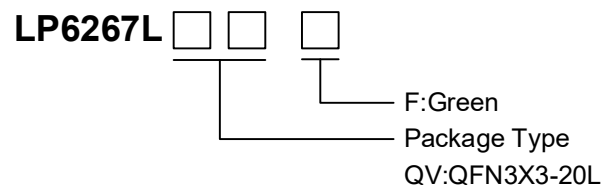

Device Information

Part Number	Top Marking	Moisture Sensitivity Level	Package	Shipping
LP6267LQVF	LPS LP6267LQVF YWX	MSL3	QFN3X3-20L	5K/REEL
Marking indication: Y: Year code. W: Week code. X: Batch numbers.				


Pin Configuration

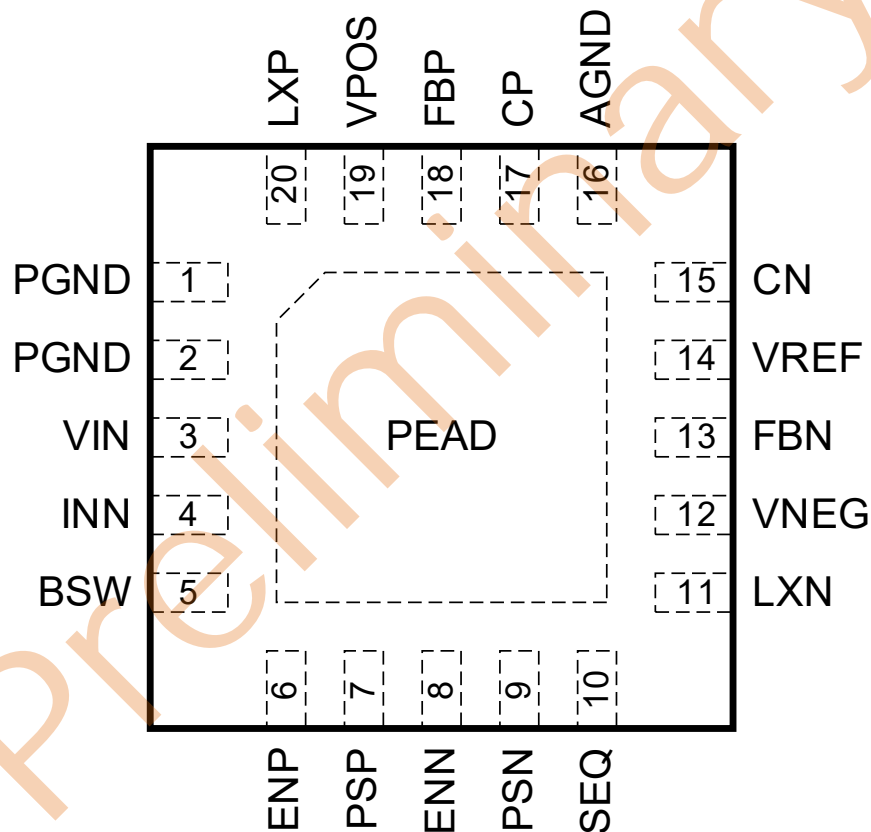

Note: Recommend connecting the Thermal Pad to the Ground for excellent power dissipation




Type Application Circuit

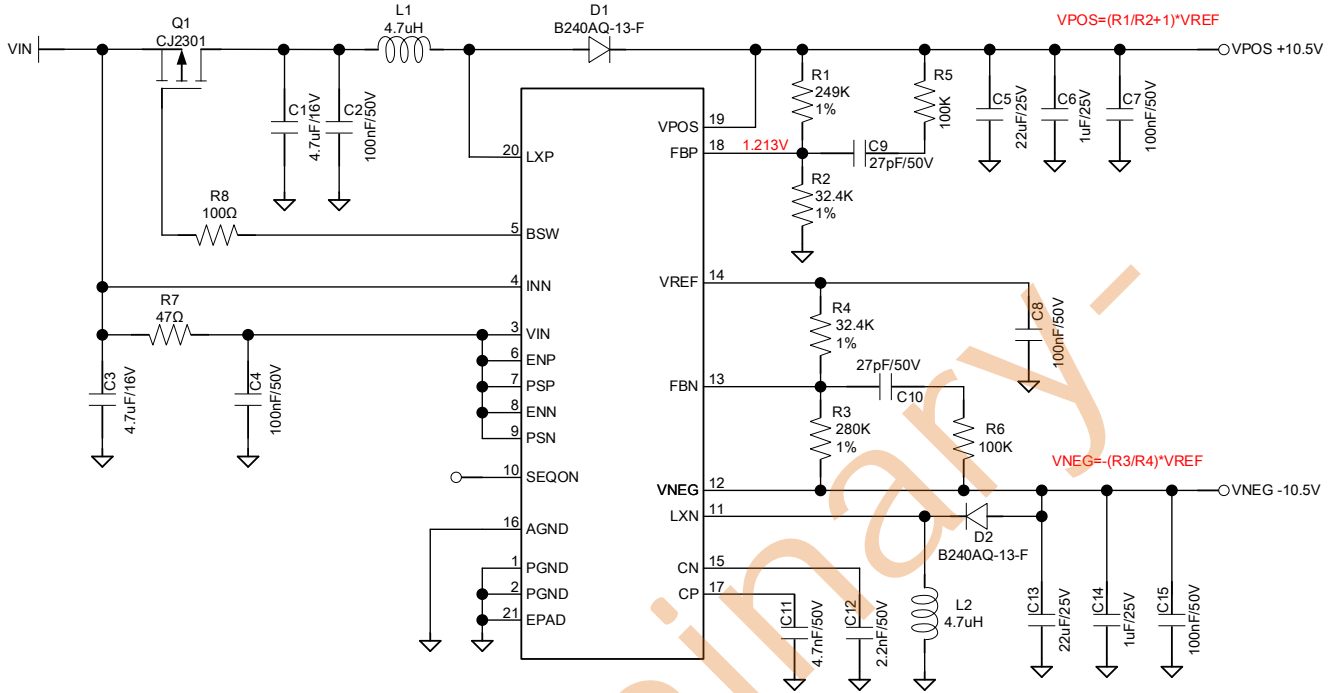

Special attention was paid to the selection of isolated PMOS(Q1), $V_{IN} - V_{GS(TH),max} > 1.5V$

Preliminary

Functional Block Diagram

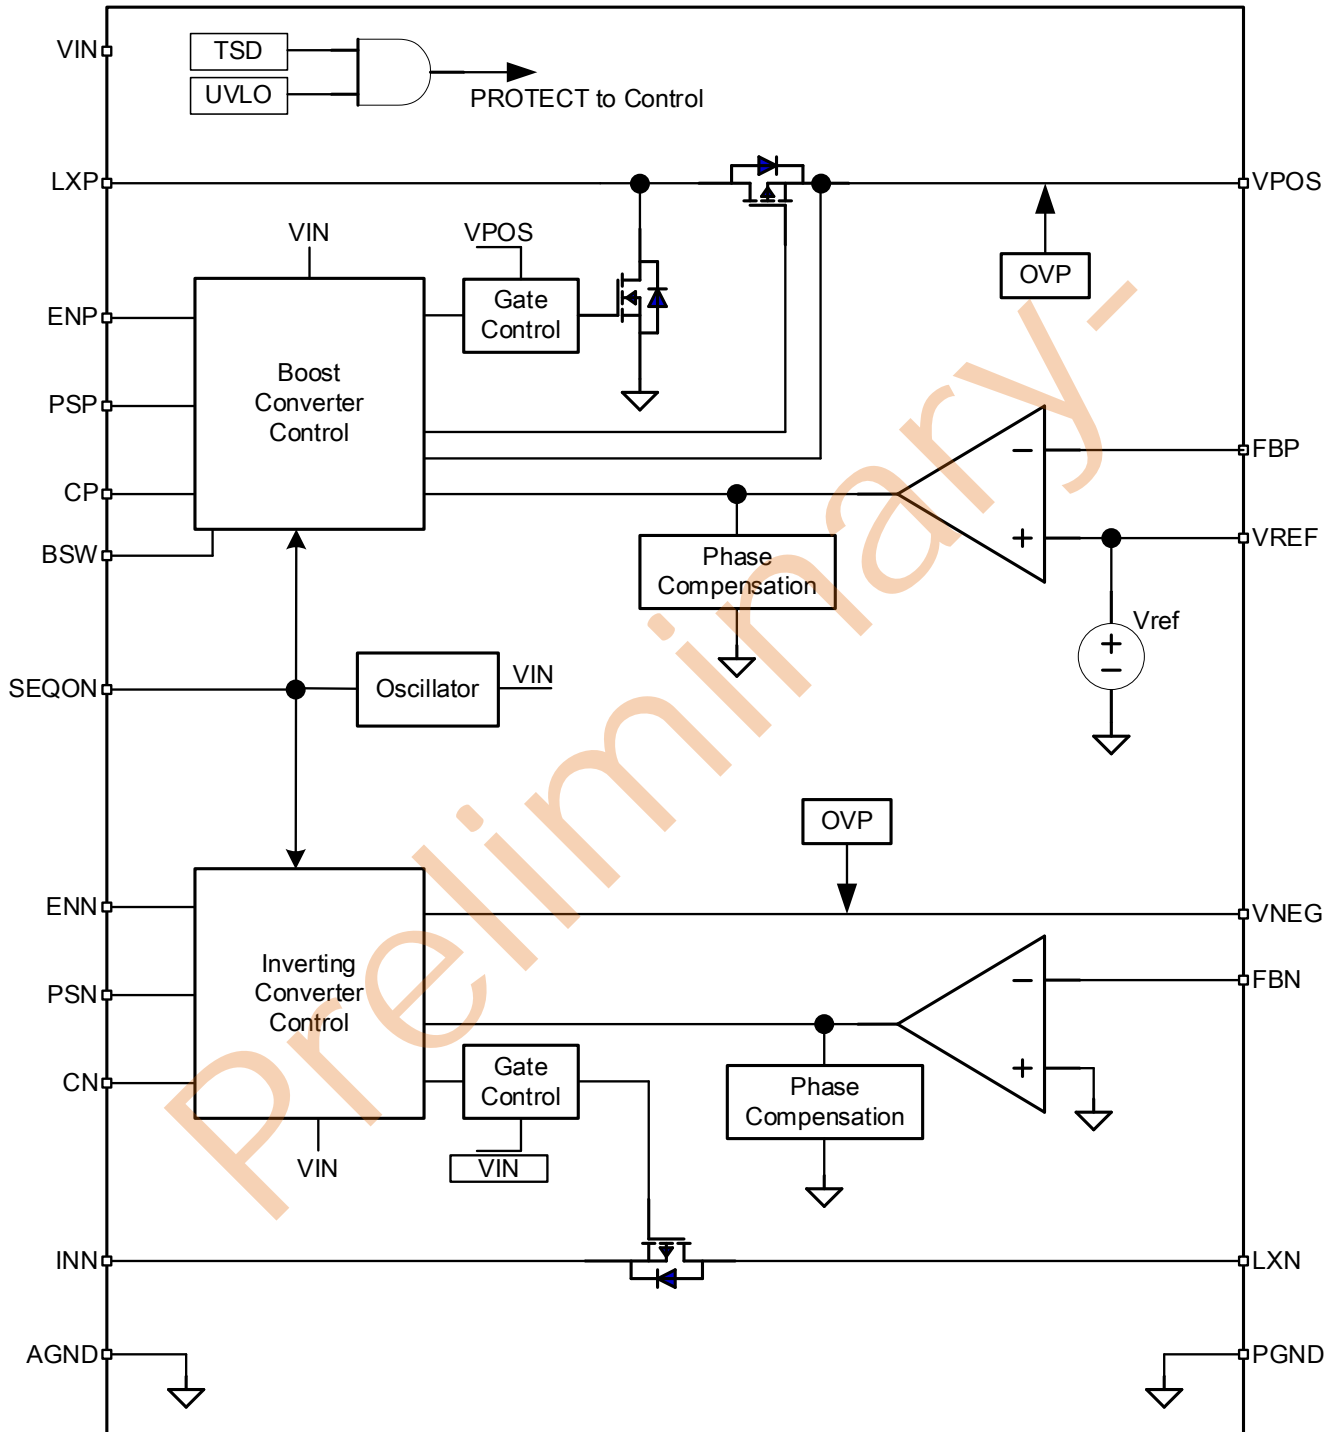

Pin Description

PIN	NAME	FUNCTION
1	PGND	Power ground PIN
2	PGND	Power ground PIN
3	VIN	Control supply input
4	INN	Inverting converter switch input
5	BSW	Gate control pin for external battery switch. This pin goes low when ENP is set high.
6	ENP	Enable pin for the positive output voltage (0V: disabled, VIN: enabled)
7	PSP	Power-save mode enable for boost converter stage (0V: disabled, VIN: enabled)
8	ENN	Enable pin for the negative output voltage (0V: disabled, VIN: enabled)
9	PSN	Power-save mode enable for inverter stage (0V: disabled, VIN: enabled)
10	SEQON	Power ON sequence Control
11	LXN	Inverting converter switch output.
12	VNEG	Negative output voltage sense input
13	FBN	Feedback pin for the negative output voltage divider
14	VREF	Reference output voltage. Bypass this pin with a 220-nF capacitor to ground. Connect the lower resistor of the negative output voltage divider to this pin
15	CN	Compensation pin for inverting converter control
16	AGND	Analog ground pin
17	CP	Compensation pin for boost converter control
18	FBP	Feedback pin for the positive output voltage divider
19	VPOS	Positive output voltage sense input
20	LXP	Boost converter switch input.
25	PGND (Exposed Pad)	GND. The exposed pad must be soldered to a large PCB and connected to GND for maximum power dissipation.

Absolute Maximum Ratings (Note 1)

VIN, INN to GND	-0.3V to +6.0V
VPOS to GND	-0.3V to +17V
VNEG to GND	-17V to VIN+0.3V
ENN, ENP to GND	-0.3V to VIN+0.3V
FBP, FBN to GND	-0.3V to VIN+0.3V
CN, CP to GND	-0.3V to VIN+0.3V
PSP, PSN, BSW to GND	-0.3V to VIN+0.3V
LXP to GND	-0.3V to +17V
VIN to LXN	-0.3V to +24V
AGND, PGND to GND	-0.3V to 0.3V

Note 1. Stresses beyond those listed “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions may affect device reliability

Recommend Operating Range

Junction Temperature	150°C
Operating Junction Temperature Range (TJ)	-40°C to 150°C
Ambient Temperature Range	-40°C to 105°C
Storage Temperature Range	-65°C to 150°C
Reflow Temperature (soldering, 10sec)	260°C
Thermal Resistance Junction to Ambient, (θJA)*	
QFN3X3-20L	TBD°C/W
Continuous Power Dissipation (TA=25°C)*	
QFN3X3-20L	TBD W
Thermal Resistance Junction to Case, (θJC)	
QFN3X3-20L	TBD°C/W

ESD Susceptibility (Note 2)

ESD HBM (Human Body Model)	4000V
ESD CDM (Charged Device Model)	1000V

Note 2. Devices are ESD sensitive. Handling precaution is recommended.



Electrical Characteristics

over the full recommended input voltage range $2.7\text{ V} \leq V_{IN} \leq 5.5\text{ V}$ and over the temperature range $-40^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$ unless otherwise noted. Typical values apply for $V_{IN} = 3.6\text{ V}$ and $T_J = 25^{\circ}\text{C}$.

PARAMETR	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_{IN} Input Voltage Range		2.7	3.3	5.5	V
V_{IN} Quiescent current	$V_{IN} = 3.6\text{ V}$, $I_{POS} = I_{NEG} = 0$, $ENP = ENN = PSP = PSN = V_{IN}$, $V_{POS} = 6\text{ V}$, $V_{NEG} = -6\text{ V}$	---	0.8	6.0	mA
I_Q Shutdown supply current	$ENN = ENP = GND$	---	100	200	μA
V_{UVLO} Under voltage lockout threshold	V_{IN} rising, turn-on IC	2.4	2.50	2.6	V
V_{UVLO_H} hysteresis Voltage	$V_{UVLO_H} = V_{UVLO_R} - V_{UVLO_F}$	0.1	0.15	0.2	V
T_{SD} Thermal shutdown		150	160	170	$^{\circ}\text{C}$
T_{HYST} Thermal shutdown hysteresis		---	15	---	$^{\circ}\text{C}$
V_{IH} ENP, ENN, PSP, PSN, SEQON	High voltage	1.4	---	---	V
V_{IL} ENP, ENN, PSP, PSN, SEQON	Low voltage	---	---	0.4	V
I_{IN} Input current, ENP, ENN, PSP, PSN	$ENP, ENN, PSP, PSN = GND$ or V_{IN}	---	0.01	0.1	μA
SEQON Internal Pull Down Resistor		---	1	---	$\text{M}\Omega$
R_{BSW} Output resistance		---	10	---	$\text{K}\Omega$
V_{POS} Adjustable output voltage range		$V_{IN}+0.5$	---	15	V
V_{NEG} Adjustable output voltage range		-15	---	-2	V
V_{REF} Reference voltage	$I_{REF} = 10\ \mu\text{A}$	1.2	1.213	1.225	V
I_{FBP} Positive feedback input bias current	$V_{FBP} = V_{REF}$		50		nA
I_{FBN} Negative feedback input bias current	$V_{FBN} = 0.1 V_{REF}$		50		nA
V_{FBP} Positive feedback regulation voltage	$V_{IN} = 2.7\text{ V}$ to 5.5 V	1.189	1.213	1.237	V
V_{FBN} Negative feedback regulation voltage	$V_{IN} = 2.7\text{ V}$ to 5.5 V	-0.024	0	0.024	V
Total Output DC accuracy		-1.5		+1.5	%
$R_{DS(ON)(N)}$ Inverter switch ON-resistance	$V_{IN} = 3.6\text{ V}$		250	400	$\text{m}\Omega$
	$V_{IN} = 5.0\text{ V}$		200	400	$\text{m}\Omega$
I_{LIMN} Inverter switch current limit	$V_{IN} = 3.6\text{ V}$	1800	2200	2600	mA
$R_{DS(ON)(P)}$ Boost switch ON-resistance	$V_{POS} = 3.6\text{ V}$		200	300	$\text{m}\Omega$
	$V_{POS} = 5\text{ V}$		150	200	$\text{m}\Omega$
I_{LIMP} Boost switch current limit	$V_{IN} = 3.6\text{ V}$; $V_{POS} = 8\text{ V}$	1800	2200	2600	mA
F_S Oscillator frequency	$-40^{\circ}\text{C} < T_a < 105^{\circ}\text{C}$	1250	1380	1500	KHz
D_{MAXP} Maximum duty Boost converter			87.5		%
D_{MAXN} Maximum duty Inverter converter			87.5		%
D_{MINP} Minimum duty Boost converter			12.5		%
D_{MINN} Minimum duty Inverter converter			12.5		%
V_{POS} Power Off Discharge	Only SEQON = Hi	---	200	---	Ω
V_{NEG} Power Off Discharge	Only SEQON = Hi	---	200	---	Ω





Timing Chart1

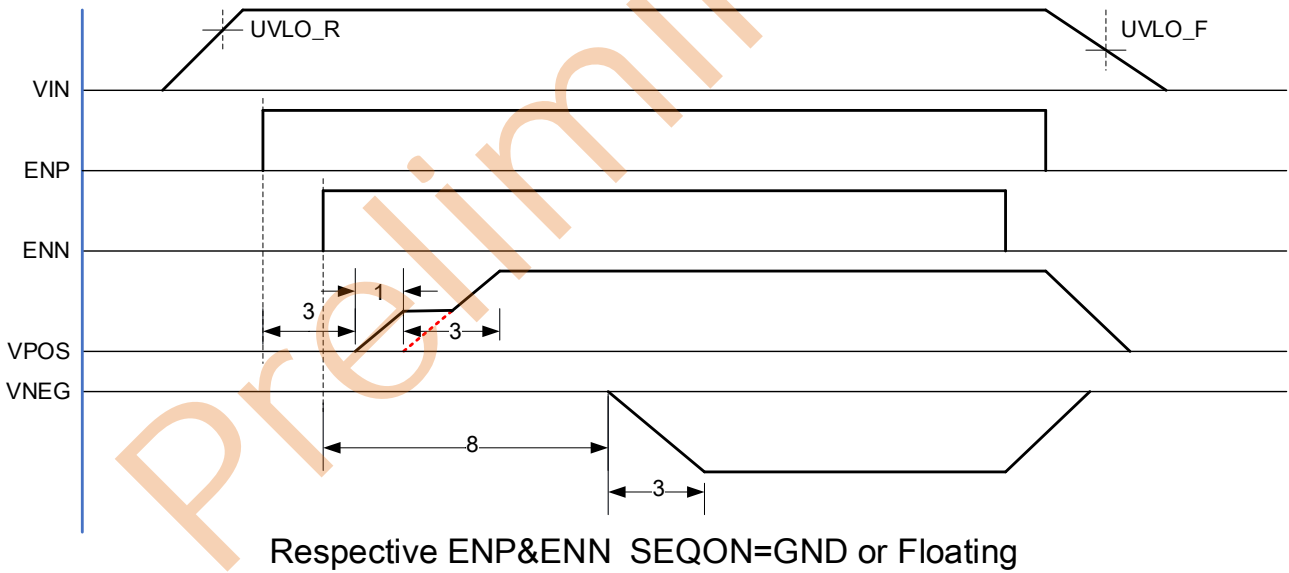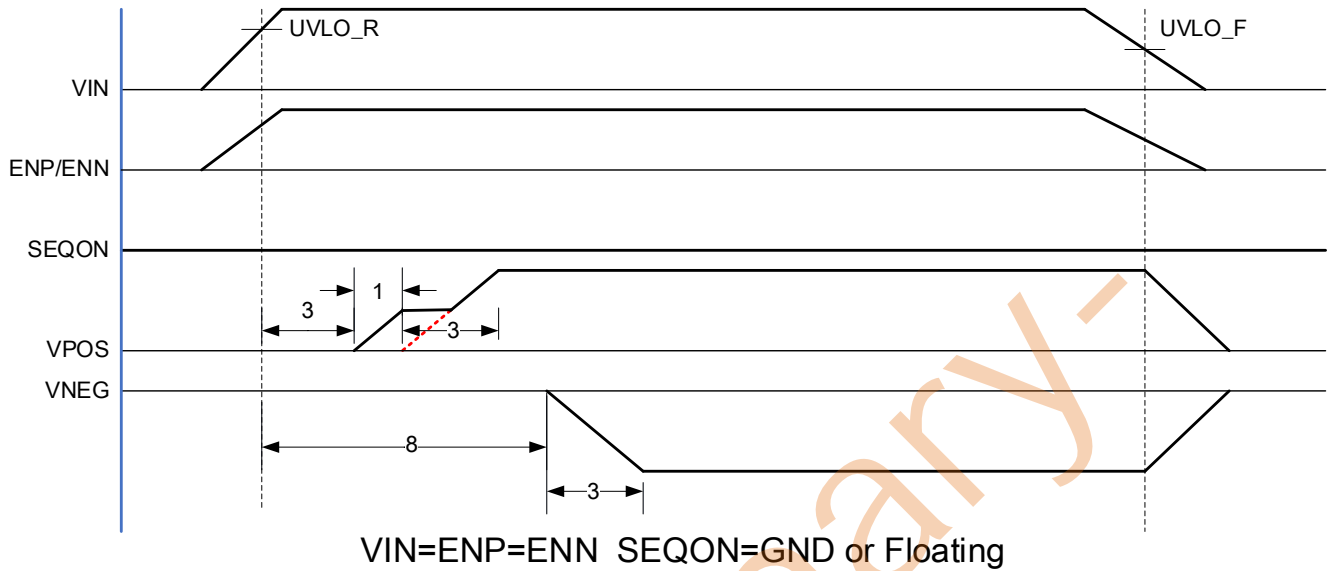



Timing Chart2

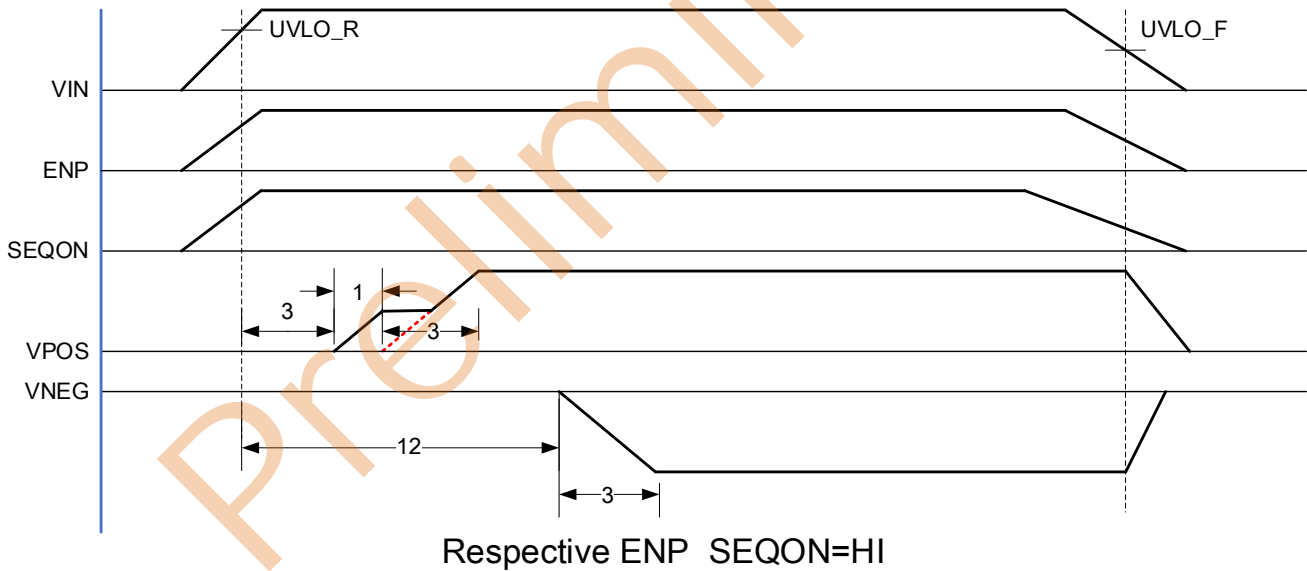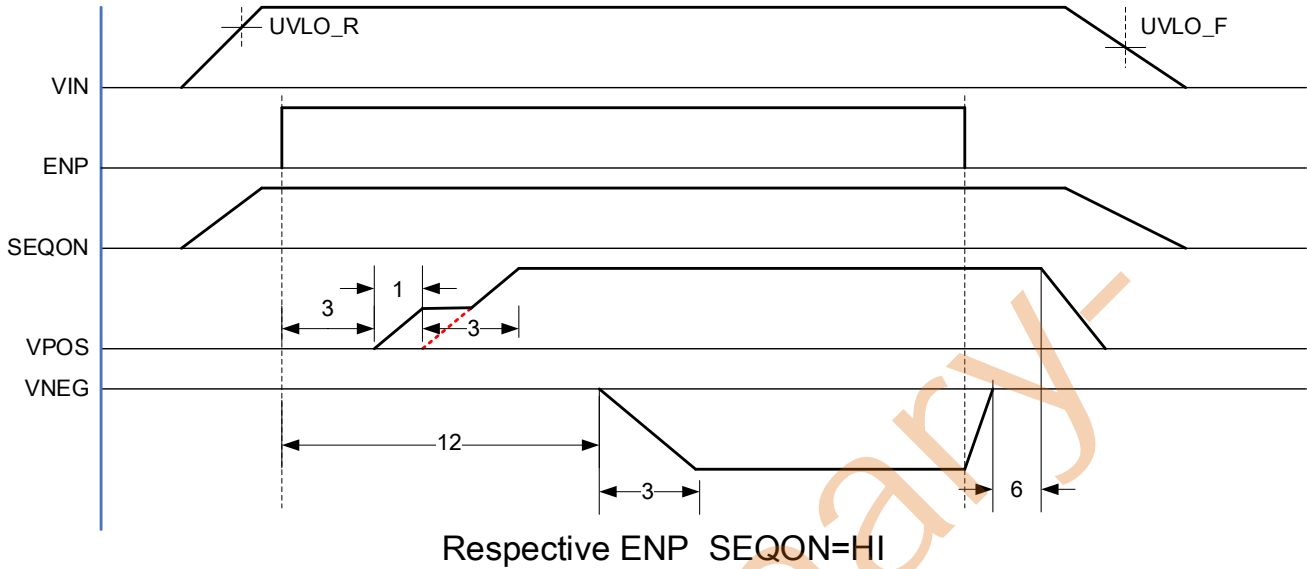



Applications Information

The LP6267L operates with an input voltage range of 2.7 V to 5.5 V and can generate both a positive and negative output. Both converters work independently of each other. They only share a common clock and a common voltage reference. Both outputs are separately controlled by a fixed-frequency, pulse-width-modulated (PWM) regulator. In general, each converter operates at continuous conduction mode (CCM). At light loads, the negative converter can enter discontinuous conduction mode (DCM). As the load current decreases, the converters can enter a power-save mode if enabled. This works independently at both converters. Output voltages can go up to 15 V at the boost output and down to -15 V at the inverter output.

Power Conversion

Both converters operate in a fixed-frequency, PWM control scheme. So, the ON-time of the switches varies depending on input-to-output voltage ratio and the load. During this ON-time, the inductor connected to the converters charge with current. In the remaining time, the time period set by the fixed operating frequency, the inductor discharge into the output capacitors through the rectifier diodes. Usually at greater loads, the inductor currents are continuous. At lighter loads, the boost converter uses an additional internal switch to allow current flowing back to the input. This avoids inductor current becoming discontinuous in the boost converter. So, the boost converter is always controlled in a continuous current mode. At the inverting converter, during light loads, the inductor current can become discontinuous. In this case, the control circuit of the inverting controller output automatically takes care of these changing conditions to always operate with an optimum control setup.

Control

The controller circuits of both converters employ a fixed-frequency, multiple-feed forward controller topology. The circuits monitor input voltage, output voltage, and voltage drop across the switches. Changes in the operating conditions of the converters directly affect the duty cycle and must not take the indirect and slow way through the output voltage control loops. Measurement errors in this feed-forward system are corrected by a self-learning control system. An external capacitor damps the output to avoid output-voltage steps due to output changes of this self-learning control system.

The voltage loops, determined by the error amplifiers, must only handle small signal errors. The error amplifiers feature internal compensation. Their inputs are the feedback voltages on the FBP and FBN pins. The device uses a comparison of these voltages with the internal reference voltage to generate an accurate and stable output voltage.

Enable

Both converters can be enabled or disabled individually. Applying a logic HIGH signal at the enable pins (ENP for the boost converter, ENN for the inverting converter) enables the corresponding output. After enabling, internal circuitry necessary to operate the specific converter turns on followed by the soft-start period.

Applying a low signal at the enable ENP or ENN pin shuts down the corresponding converter. When both enable pins are low, the device enters shutdown mode, where all internal circuitry turns off. At this point, the device consumes shutdown current flowing into the VIN pin. The output loads of the converters can be disconnected from the input

Load Disconnect

The device supports completely disconnecting the load when the converters are disabled. For the inverting converter, the device turns off the internal PMOS switch. If the inverting converter is turned off, no DC current path remains which could discharge the battery or supply.

This is different for the boost converter. The external rectifying diode, together with the boost inductor, form a DC current path which could discharge the battery or supply if any load connects to the output. The device has no internal switch to prevent current from flowing. For this reason, the device offers a PMOS gate control output (BSW) to enable and disable a PMOS switch in this DC current path, ideally directly between the boost inductor and battery. To be able to fully disconnect the battery, the forward direction of the parasitic backgate diode of this switch must point to the battery or supply. The external PMOS switch, which connects to BSW, turns on when the boost converter is enabled and turns off when the boost converter is disabled.

Soft-Start

Both converters have implemented soft-start functions. When each converter is enabled, the implemented switch current limit ramps up slowly to its nominal programmed value in about 3 ms. Soft-start is implemented to limit the input current during start-up to avoid high peak currents at the battery which could interfere with other systems connected to the same battery. Without soft-start, the high input peak current could trigger the implemented switch current limit, which can lead to a significant voltage drops across the series resistance of the battery and its connections.

Over Voltage Protection

Both converters (boost and inverter) have implemented individual over voltage protection. If the feedback voltage under normal operation exceeds the nominal value by typically 5%, the corresponding converter shuts down immediately to protect any connected circuitry from possible damage.

Under Voltage Lockout

An undervoltage lockout (UVLO) prevents the device from starting up and operating if the supply voltage at the VIN pin is lower than the undervoltage lockout threshold. For this case, the device automatically shuts down both converters when the supply voltage at VIN falls below this threshold. Nevertheless, parts of the control circuits remain active, which is different than device shutdown.

Over Temperature Shutdown

The device automatically shuts down both converters if the implemented internal temperature sensor detects a chip temperature above the thermal shutdown temperature. It automatically starts operating again when the chip temperature falls below this thermal shutdown temperature. The built-in hysteresis avoids undefined operation caused by ringing from shutdown and prevents operating at a temperature close to the over temperature shutdown threshold.


Layout Consideration

As for all switching power supplies, the layout is an important step in the design, especially at high peak currents and high switching frequencies. Improper layout might show the symptoms of poor line or load regulation, ground and output voltage shifts, stability issues, unsatisfying EMI behavior or worsened efficiency. Therefore, use wide and short traces for the main current paths and for the power ground tracks. The input capacitors (C1, C2, C3), output capacitors (C4, C5), the inductors (L1, L2), and the rectifying diodes (D1, D2) should be placed as close as possible to the IC to keep parasitic inductances low. Use a wide power ground (PGND) plane. Connect the analog ground pin (AGND) to the PGND plane. Further, connect the PGND plane with the exposed thermal pad. Place the feedback dividers as close as possible to the control pin (boost converter) or the VREF pin (inverting converter) of the IC.

Preliminary



Packaging Information

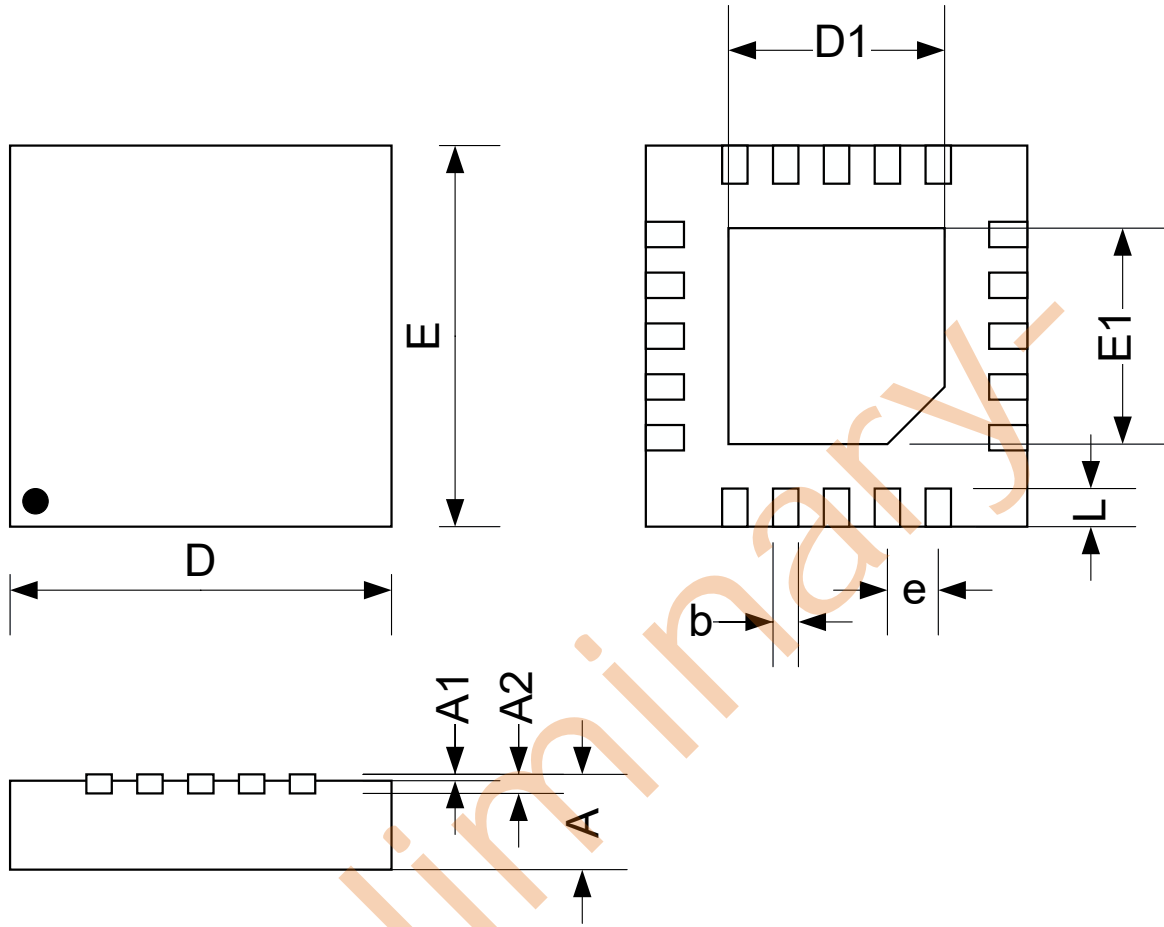

QFN3X3-20L

Symbol	DIMENSION IN MM			DIMENSION IN INCH		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	0.70	0.75	0.80	0.0276	0.0295	0.0315
A1	0.00	---	0.05	0.0000	---	0.0020
A2	0.152 REF			0.0060 REF		
D	2.95	3.00	3.05	0.1161	0.1181	0.1378
E	2.95	3.00	3.05	0.1161	0.1181	0.1378
D1	1.60	1.70	1.80	0.0630	0.0670	0.0709
E1	1.60	1.70	1.80	0.0630	0.0670	0.0709
b	0.15	0.20	0.25	0.0059	0.0079	0.0098
e	0.40 BSC			0.0157 BSC		
L	0.25	0.30	0.35	0.0098	0.0118	0.0138